

# CP-X308



## BUSINESS PROJECTOR

The Hitachi CP-X308 is a 2600 ANSI Lumen portable video and data projector, perfect for high end business or education use. The CP-X308 includes many advanced security and video enhancement features along with an impressive brightness and low fan noise - all at an affordable price.

- 2600 ANSI Lumens with optical zoom
- Full connectivity
- Quick Start and Instant Off
- Auto vertical keystone
- Input source naming
- My Button
- 7W audio output
- Whiteboard Mode and Blackboard Mode
- Anti theft features:
  - PIN-lock, MyScreen lock, transition detector
- PC less presentation
  - USB slot, SD card slot
- Wireless - IEEE802.11b/g, multi-image display (up to 4 PC's)
- Wired LAN



**HITACHI**  
Inspire the Next

# CP-X308

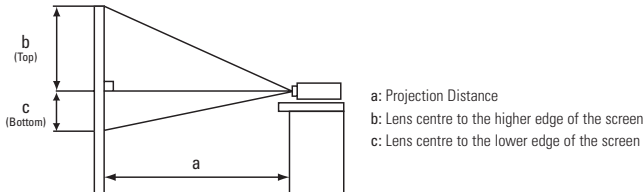
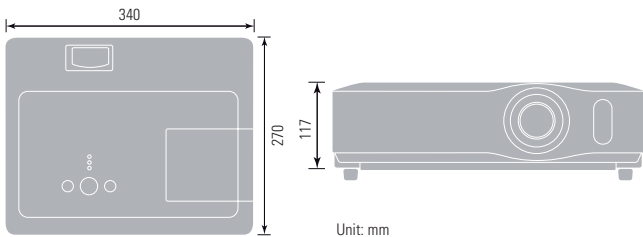


Image Size 4:3				
Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
40" (1.0)	1.2	1.4	55	6
60" (1.5)	1.8	2.2	82	9
100" (2.5)	3.0	3.6	137	15
150" (3.8)	4.6	5.5	206	23
200" (5.1)	6.1	7.3	274	30
300" (7.6)	9.1	11.0	411	46

# CP-X308 Technical Specifications

## OPTICAL

LCD panel		0.63" P-Si TFT x 3
Resolution		XGA: 1024 dots x 768 lines
Brightness	Normal mode	2600 ANSI Lumens
	Whisper mode	2100 ANSI Lumens
Contrast ratio		500:1 (typ)
Lens		F1.7-1.9 (f=19.5-23.4mm) Manual Focus, Manual Zoom x 1.2
Lamp		220W UHB
Lamp life		2000 (normal)/3000 (whisper)
Projection distance		0.9 - 11.0m
Distance to width ratio (:1)		1.5 (WIDE), 1.8 (TELE)
Diagonal display size		30-300" (60"@1.8m, Wide)
Number of colour		8 Bit/colour, 16.7M colours
Keystone correction		9:1upward shift, fixed

## COMPATIBILITY

Computer compatibility	IBM Compatible VGA, SVGA, XGA, SXGA/SXGA+, UXGA Compressed, MAC 16" (Pixelworks chip)
Video compatibility	NTSC/PAL(-BGDHI)/SECAM/PAL-M,N/NTSC4.43 SDTV: 525i(480i), 525p(480p), 625i(576i) HDTV: 720p (720p@50/60Hz), 1125i(1080i@50/60Hz)
Plug & Play	DCC2B
Frequency range	FV 56-120Hz, FH 31.5-106kHz

## FEATURES

Audio output	7W Mono
Other	Freeze, Magnifying, Blank, Auto adjustment, Search, Page UP&DOWN (for USB mouse function), Equalising Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction, Auto V keystone +/- 30 degrees (@XGA 60Hz), MyScreen, My Memory, My Button, blackboard/whiteboard mode, Input source naming (English), Resolution setting, Easy lamp replace from top, Air filter on side, Serial number label on side, Quick ON (4 sec), Direct ON, Direct OFF, Security bar, PIN Lock, MyScreen PIN lock, Keypad Lock, Kensington slot, Transition Detector
PC less presentation	USB slot, SD slot support (jpeg, bmp, png, motion picture (MPEG4 standard profile) support)
OSD languages	MENU : 17 language

## CONNECTIONS

Computer input	15-pin Mini D-sub x 2
Computer output	15-pin Mini D-sub x 1
Video input	RCA Jack x 1
	S-Video Jack x 1
	RCA Jack x 3 for Component
Audio input	Stereo Mini Jack x 2
	RCA (L/R) x 1 pair (Selectable on OSD)
Audio output	Stereo Mini Jack x 1
Control and mouse	9-pin D-sub x 1 for RS232 control
	USB type B x 1 for mouse control
PC less presentation	USB type A x 1, SD slot x 1 (shared with wireless)
Networking	Controlling & Monitoring, WEB control, e-shot, scheduling function (RJ-45). 302.11b/g Wireless presentations, control & monitoring, web control.
	SD wireless control card included

## WIRELESS NETWORKING

802.11b/g Wireless presentations, control & monitoring, web control. SD wireless control card included

## POWER

Power supply	100 - 120V/220 - 240, 50/60 Hz 3.5A/1.5A
Power consumption	350W

## PHYSICAL

Dimensions (W x H x D)	340 x 117 x 270mm (excluding feet and extrusions)
Weight	4.0Kg (Target)/8.8lbs
Noise level	35dB/29dB
Air filter	MU04951

## MISCELLANEOUS

Lamp indicator light, Power light, Ceiling mount image, Rear projection image

## CERTIFICATION

UL60950/C-UL, FCC Part 15 Class B, 'CE, AS/NZS CISPR22 Class B

## ACCESSORIES SUPPLIED

Remote control with batteries, Computer cable, Power cord, User manual (detail & concise), Softcase, Lens cap (& strap), Security label, AV cable, SD wireless LAN card, Application CD, Slot cover Lock MTL

## OPTIONAL ACCESSORIES

Replacement Lamp	DT00841
------------------	---------

Image Size 16:9				
Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
40" (1.0)	1.3	1.6	51	-2
60" (1.5)	2.0	2.4	77	-2
100" (2.5)	3.3	4.0	129	-4
150" (3.8)	4.9	6.0	193	-6
200" (5.1)	6.6	8.0	257	-8
300" (7.6)	9.9	12.0	386	-12