Stewart FILMSCREEN | COMMERCIAL

LumiGlas 130

LumiGlas 130 is ideal for data, video, film, and power point presentations where ambient light is controllable

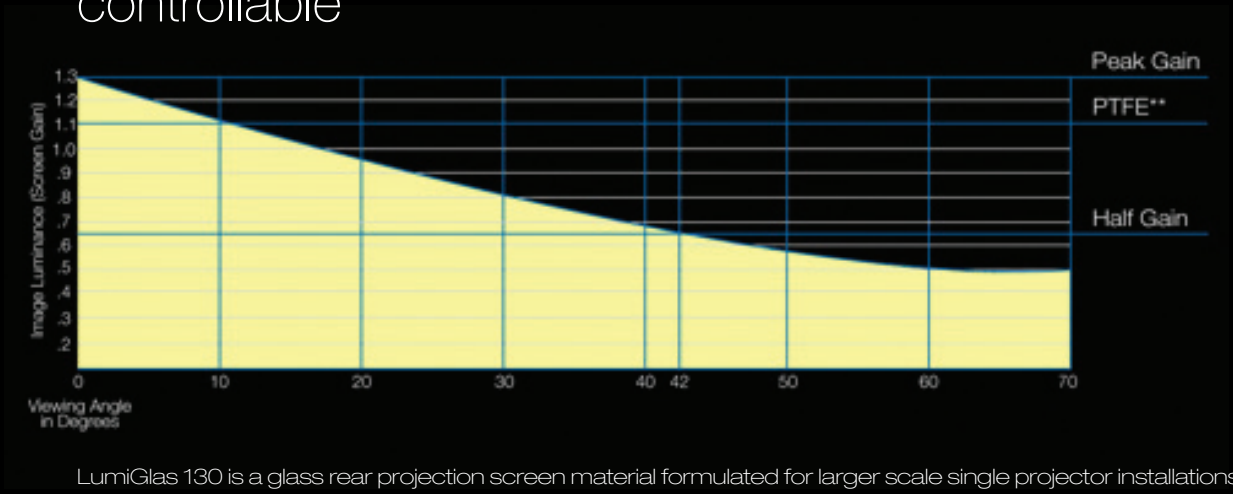

LumiGlas 130 is a glass rear projection screen material formulated for larger scale single projector installations. LumiGlas 130 is used in many business applications and is ideal for data, video, film, and power point presentations where ambient light is controllable. It provides a wide viewing angle for wide seating plans.

FEATURES

- Superb white field uniformity
- High level of soundproofing between the projector and the audience area
- Identical gain and color matching for multiple screen applications

Material Type	Glass Rigid Rear Screen
Gain	1.3
Half Gain	42 degrees
Minimum Throw Distance	1.3 x image width
Ambient Light Front Reflectance Value	25% per foot candle
Ambient Light Resistance	Controlled lighting is required
Edge Blending Properties	Not recommended
Lay Flat Quality	Excellent
Flame Resistance	Yes
Size Limitations	10.83' x 35.6'
Material Thickness	1/2" *
Screen Models	Rigid frames and multi-masking systems

* Once the length exceeds 30' the material thickness increases to 3/4".

Stewart FILMSCREEN | COMMERCIAL

Find your local representative at www.stewartfilmscreen.com/reps

1161 W Sepulveda Blvd Torrance CA 90502 800.762.4999 I Tel: 310.784.5300 I Fax: 310.326.6870 | Email: sales@stewartfilm.com I www.stewartfilmscreen.com
© Stewart Filmscreen Corporation, specifications are subject to change without notice.